



Product: "DAOS" Dehorner
Job: Animal Husbandry, Farming
Users: Professional

Energy: Regulated butane - Propane

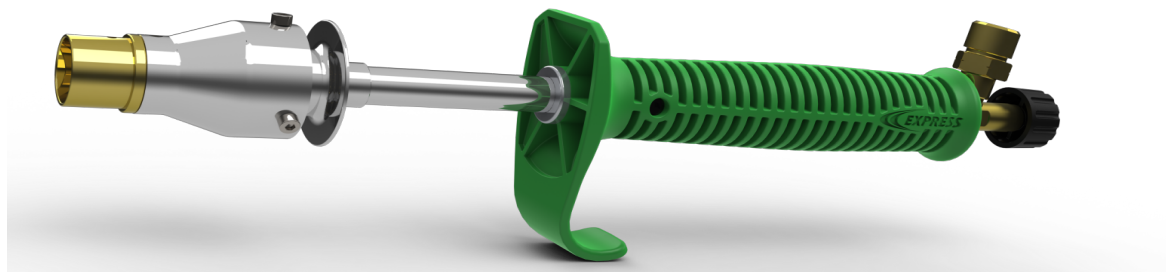

Cat. No. 114/1 content

- One complete "DAOS" dehorner
- 1.50 m ISO 3821 hose with crimped ends
- One regulator valve for cartridge
- One gas cartridge (Cat. No. 446)
- Instructions
- Comes in a bag



Functions

- Manual ignition
- Power adjustment wheel
- Removable tip
- Reversible tip
- Lightweight - 310 g

Technical data

Weight of complete tool alone	310 g
Butane / propane cylinder type	
Cartridge type	556
Time to reach maximum temperature	180 sec.
Time to reach 500 °C (working temp.)	70 sec.
Maximum temperature	730 °C ±20 °C
Sound level when cold (ignition)	75 dbA
Sound level when hot	60 dbA
Operation pointing downward (work position)	YES
Consumption	34 g/h
Power (W)	460 Wh
Power (BTU/h)	1600 BTU/h
Operating time (with Cat. No. 446 cartridge)	2 hrs

Cat. No. 114/2 content

- One Cat. No. 114 dehorner
- 4.75 m ISO 3821 hose with crimped ends
- One 2-bar propane regulator (Cat. No. 682)
- Instructions
- Comes in a bag



Spare parts

Cartridge valve + 1.50 m hose kit	Réf. 16411
Fixed 2-bar regulator	Réf. 682
Nozzle	Réf. 14014
Cattle tip int. Ø 17 mm / 19 mm	Réf. 14020
Goat tip int. Ø 15 mm	Réf. 14015
4.75 m ISO 3821 hose	Réf. 963/5